



Truck and Bus Tire Catalog

O***VATION***
TIRES





Shandong Changfeng Tyres Co., Ltd.

Company Profile:

OVATION Tires, enjoying high popularity in both domestic and international markets, is one of the major brands developed by Shandong Changfeng Tyres Co., Ltd.

Shandong Changfeng Tyres Co., Ltd., one of the major tire manufacturers in China, was established in 1995 and covers an area of 2 million square meters, with total assets of over 5 billion RMB and more than 10,000 employees. The company owns 6 plants in Dongying and Linyi city, Shandong province, China. Three plants are for TBR products with annual production capacity of 6 million tires, another three plants are for PCR products with annual production capacity of 30 million tires.

Changfeng specializes in manufacturing radial tires which are widely used in passenger car, SUV, light truck, truck and bus etc., and in all seasons with excellent performance, which are well-reputed all over the world.


Changfeng takes pride in its experienced R&D team and advanced testing facilities, which assure the excellent and stable quality of its products. Many of Changfeng's manufacturing equipments are imported from Europe, United States and Japan.

Changfeng has built a strong quality assurance system and its products are accredited with certificates of ISO9001, IATF16949, DOT, ECE, GCC, INMETRO, CCC, BIS, SNI, SONCAP, etc.



We export to more than 120 countries in the world

Version 2022

Ovation RADIAL PRTTERN RANGE		ROAD		LONG & REGIONAL HAUL	MIXED SERVICE	OFF ROAD
POSITION						
ALL POSITION						
				  	  	
						
STEER/TRAILER						
				      		
				   		
DRIVE						
				      	     	   
				   	  	
TRAILER						
				  		   
						



ALL POSITION



VI-708

Features

- ▶ Three groove design with lugs
- ▶ Special tread compound
- ▶ Shoulder design with lugs and sipes

Benefits

- ▶ Provide outstanding wet performance
- ▶ Provide outstanding resistance to abrasion
- ▶ Provide excellent heat dissipation



VI-117

Features

- ▶ Three zigzag grooves design with lugs
- ▶ Special tread compound
- ▶ Shoulder design with lugs and sipes

Benefits

- ▶ Provide excellent wet performance
- ▶ Provide outstanding resistance to abrasion
- ▶ Provide outstanding heat dissipation



VI-599+

Features

- ▶ Four circumferential grooves
- ▶ Ladder arrangement design of longitudinal pattern
- ▶ Special tread compound
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Reduce irregular wear greatly
- ▶ Provide outstanding resistance to abrasion
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity



Long Haul



Regional Haul



Operation:

- Highways and long distance / Regional highways and city streets
- Well paved road conditions / Mainly used on paved roads, occasionally run on unpaved roads
- Constant and high speed with minimal braking and accelerating / Frequent braking, accelerating and turning

Size	VI-708	VI-117	VI-599+
9.00R20	144/142 K		
10.00R20	149/146 K		
11.00R20	152/149 K		152/149 J
12.00R20	156/153 K		
12R22.5		152/149 L	



STEER/TRAILER



***VI-330**

Features

- Four wide circumferential grooves
- Special groove design
- Siped rib and shoulder design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Deliver stone-ejecting property
- Provide excellent heat dissipation



***VI-660**

Features

- Four wide circumferential grooves
- Siped rib and shoulder design
- Reinforced carcass and wide tread
- Specially designed compound

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent heat dissipation
- Ensure excellent handling and safe performance
- Deliver lower rolling resistance



***VI-606**

Features

- Four zigzag grooves
- Solid shoulder design
- Variable pitch design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance



***VI-606+**

Features

- Four zigzag grooves
- Solid shoulder design
- Variable pitch design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance

Size	VI-330	VI-660	VI-606	VI-606+	Remarks
9.00R20			144/142 K		The symbol of "*" represents patterns applicable for all position bus.
10.00R20			149/146 K		
11.00R20			152/149 K		
12.00R20			156/153 K		
11R22.5	148/145 M	148/145 M	148/145 M		
12R22.5	152/149 M	152/149 M			
13R22.5		156/152 L(154/151 M)			
215/75R17.5		135/133 J			
255/70R22.5		140/137 L			
295/80R22.5		152/149 M			
315/70R22.5		154/150 L(152/148 M)			
315/80R22.5		156/152 L(154/151 M)		156/152 L(154/151 M)	



STEER/TRAILER



VI-688

Features

- Four wide circumferential grooves
- Siped rib and shoulder design
- Specially designed compound

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent heat dissipation
- Deliver lower rolling resistance



VI-111

Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion



VI-121

Features

- Four circumferential grooves
- Solid shoulder design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance



VI-123

Features

- Four circumferential grooves
- Solid shoulder design
- Specially designed compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Provide outstanding resistance to abrasion
- Reduce rolling noise greatly
- Deliver lower rolling resistance

Size	VI-688	VI-111	VI-121	VI-123
8.25R16LT			128/124 M	
11.00R20			152/149 K	152/149 K
9.5R17.5			143/141 J	
11R22.5		146/143 L		
11R24.5		146/143 M		
11R24.5		149/146 L		
215/75R17.5		135/133 L		
235/75R17.5		143/141 L		
225/70R19.5		128/126 L		
245/70R19.5		135/133 L		
255/70R22.5		140/137 L		
295/75R22.5		144/141 M		
295/75R22.5		146/143 L		
295/80R22.5	152/149 M		152/149 M	
315/70R22.5			154/150 L(152/148 M)	
315/80R22.5			156/152 L(154/151 M)	
285/75R24.5		144/141 M		
285/75R24.5		147/144 L		



STEER/TRAILER



VI-124

Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion



VI-680

Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion



VI-127

Features

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Solid shoulder design

Benefits

- Provide excellent heat dissipation and improved regular wear with lower resistance
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide outstanding resistance to abrasion

Size	VI-124	VI-680	VI-127
7.50R16LT			125/121 L
315/80R22.5	156/152 L(154/151 M)	156/152 L(154/151 M)	



DRIVE



VI-122

Features

- Three circumferential grooves
- Block pattern design
- Special tread compound
- Solid shoulder design

Benefits

- Ensure outstanding water evacuation, even pressure distribution and heat dissipation
- Provide excellent driving and braking force
- Provide outstanding resistance to puncture and tearing
- Provide outstanding resistance to abrasion



VI-668

Features

- Special tread compound
- Four circumferential grooves
- Deeper tread depth design
- Block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Improved mileage performance
- Provide excellent driving and braking force



VI-628

Features

- Asymmetric lug design
- Block pattern design
- Four circumferential grooves
- Reinforced carcass and bead design

Benefits

- Combine regular wear with excellent traction
- Provide excellent driving and braking force
- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Ensure excellent handling and safe performance and provide outstanding loading capacity



VI-607

Features

- Four circumferential grooves
- Block pattern design
- Special tread compound
- Solid shoulder design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Provide excellent driving and braking force
- Provide outstanding resistance to puncture and tearing
- Provide outstanding resistance to abrasion

Size	VI-122	VI-668	VI-628	VI-607
10.00R20		149/146 K		
12.00R24	160/157 K			160/157 K
11R22.5			148/145 M	
12R22.5			152/149 L	
13R22.5			156/152 L(154/151 M)	
215/75R17.5			135/133 J	
235/75R17.5			143/141 J	
295/80R22.5		152/149 M	152/149 M	
315/70R22.5			154/150 L(152/148 M)	
315/80R22.5	156/152 L(154/151 M)		156/152 L(154/151 M)	



DRIVE



VI-312

Features

- ▶ Block pattern design
- ▶ Solid shoulder design
- ▶ Four wide circumferential grooves

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Provide outstanding resistance to abrasion
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation



VI-638

Features

- ▶ Block pattern design
- ▶ Extra wide footprint
- ▶ Deeper tread depth design

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Enhanced stability and resistance to abrasion
- ▶ Improved mileage performance



VI-505

Features

- ▶ Block pattern design
- ▶ Extra wide footprint
- ▶ Deeper tread depth design

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Enhanced stability and resistance to abrasion
- ▶ Improved mileage performance



VI-323

Features

- ▶ Block pattern design
- ▶ Open shoulder design
- ▶ Special tread compound

Benefits

- ▶ Provide excellent traction
- ▶ Improved heat dissipation to increase tire life
- ▶ Provide mileage performance

Size	VI-312	VI-638	VI-505	VI-323
10.00R20		149/146 K	149/146 K	
11R22.5	146/143 L	148/145 M		146/143 L
12R22.5		152/149 M		
11R24.5	146/143 M			146/143 M
11R24.5	149/146 L			149/146 L
295/75R22.5	144/141 M			144/141 M
295/75R22.5	146/143 L			146/143 L
315/70R22.5		154/150 L(152/148 M)		
315/80R22.5		156/152 L(154/151 M)		
285/75R24.5	144/141 M			144/141 M
285/75R24.5	147/144 L			147/144 L



DRIVE



VI-326

Features

- ▶ Asymmetric lug design
- ▶ Block pattern design
- ▶ Four circumferential grooves
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Combine regular wear with excellent traction
- ▶ Provide excellent driving and braking force
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity



VI-328

Features

- ▶ Block pattern design
- ▶ Extra wide footprint
- ▶ Deeper tread depth design

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Enhanced stability and resistance to abrasion
- ▶ Improved mileage performance



VI-331

Features

- ▶ Block pattern design
- ▶ Solid shoulder design
- ▶ Four wide circumferential grooves

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Provide outstanding resistance to abrasion
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation

Size	VI-326	VI-328	VI-331
295/80R22.5	152/149 M		
315/70R22.5	154/150 L		
315/80R22.5	156/152 L	156/152 L	156/152 L



TRAILER



VI-022

Features

- Four zigzag grooves
- Extra wide footprint with square shoulder
- Special tread compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Enhanced stability and resistance to abrasion
- Provide outstanding resistance to abrasion



VI-618

Features

- Four circumferencial grooves
- Special groove design
- Curved lug design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Deliver stone-ejecting property
- Deliver excellent driving and braking force



VI-126

Features

- Four circumferencial groove designs
- Reduced tire weight

Benefits

- Improved antiskid performance
- Deliver rolling resistance and lower fuel consumption

Size	VI-022	VI-118	VI-126
11R22.5		148/145 M	146/143 L
12R22.5		152/149 M	
11R24.5			149/146 L
235/75R17.5	143/141 J		
295/75R22.5		144/141 M	
295/75R22.5		146/143 L	146/143 L
385/65R22.5	160 K		
285/75R24.5			147/144 L



Mixed
Service



Operation:

- Frequently used on and off roads
- Heavier loads
- Construction site



- Features**
 - Three zigzag grooves
 - Combination of rib and lug design
 - Shoulder design with lugs
- Benefits**
 - Provide excellent anti-sideslipping performance and ensure excellent water evacuation
 - Deliver outstanding traction and handling
 - Provide excellent heat dissipation



- Features**
 - Three zigzag grooves
 - Combination of rib and lug design
 - Shoulder design with lugs
- Benefits**
 - Provide excellent anti-sideslipping performance and ensure excellent water evacuation
 - Deliver outstanding traction and handling
 - Provide excellent heat dissipation



- Features**
 - Three zigzag grooves
 - Reinforced carcass and bead design
 - Special groove design
 - Shoulder design with lugs
- Benefits**
 - Provide excellent anti-sideslipping performance and ensure excellent water evacuation
 - Ensure excellent handling and safe performance and provide outstanding loading capacity
 - Deliver stone-ejecting property
 - Provide excellent heat dissipation

Size	VI-702	VI-011	VI-307
6.50R16LT	110/105 K		
7.00R16LT	118/114 M		
7.50R16LT		122/118 M	
8.25R16LT	128/124 M		
8.25R20	139/137 L		
9.00R20	144/142 K		
10.00R20	149/146 K		149/146 K
11.00R20	152/149 K		152/149 K
12.00R20	156/153 K		156/153 K
12.00R24	160/157 K		
11R22.5	148/145 M		
12R22.5	152/149 M		152/149 L
13R22.5	156/152 L(154/151 M)		
11R24.5	149/146 L		
315/80R22.5		156/152 L(154/151 M)	



- Features**
 - Special tread compound
 - Block pattern design
 - Extra wide footprint with square shoulder
 - Reinforced carcass and bead design
- Benefits**
 - Provide outstanding resistance to puncture and tearing
 - Provide excellent driving and braking force
 - Enhanced stability and resistance to abrasion
 - Ensure excellent handling and safe performance and provide outstanding loading capacity



- Features**
 - Lug and block pattern design
 - Special tread compound
- Benefits**
 - Improved traction, driving and braking performance
 - Provide outstanding resistance to puncture and tearing



- Features**
 - Special tread compound
 - Lug and block pattern design
 - Siped pattern and shoulder design
- Benefits**
 - Provide outstanding resistance to puncture and tearing
 - Improved traction, driving and braking performance
 - Provide excellent heat dissipation



- Features**
 - Lug and block pattern design
 - Special groove design
 - Special tread compound
 - Open shoulder design
- Benefits**
 - Improved traction, driving and braking performance
 - Deliver stone-ejecting property
 - Provide outstanding resistance to puncture and tearing
 - Provide excellent heat dissipation

Size	VI-768	VI-706	VI-701	VI-313
7.00R16LT		118/114 M		
7.50R16LT		122/118 M		122/118 M
8.25R16LT		128/124 M		128/124 M
8.25R20		139/137 L		139/137 K
9.00R20		144/142 K	144/142 J	144/142 K
10.00R20	149/146 K	149/146 K	149/146 K	149/146 K
11.00R20	152/149 J	152/149 K	152/149 K	152/149 K
12.00R20	156/153 J	156/153 K	156/153 K	156/153 K
12R22.5	152/149 M		152/149 M	
13R22.5	156/152 L(154/151 M)			
315/80R22.5	156/152 L(154/151 M)			

VI-322

Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance

VI-729

Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance

VI-303

Features

- Inter-connected block pattern
- Reinforced carcass and bead design
- Special groove design

Benefits

- Provide excellent driving force, cutting resistance and even wear
- Ensure excellent handling and safe performance and provide outstanding loading capacity
- Deliver stone-ejecting property

VI-325

Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance

Size	VI-322	VI-729	VI-303	VI-325
7.00R16LT			118/114 K	
7.50R16LT			122/118 J	
8.25R16LT			128/124 J	
8.25R20			139/137 K	
9.00R20			144/142 J	
10.00R20			149/146 K	
11.00R20			152/149 J	
12.00R20			156/153 J	
12.00R24	160/157 K	160/157 K		160/157 K
11R22.5		148/145 L		
315/80R22.5	156/152 L(154/151 M)			

VI-768W


Features

- Large block & Deep groove design
- Open shoulder design
- Optimized tread compound
- Special horizontal small groove design

Benefits

- Provides excellent traction and braking force
- Provides good traction and self-cleaning performance
- Provides excellent tear resistance, cut resistance and snow traction
- Improve snow traction performance

Size	VI-768W
315/80R22.5	156/152 L(154/151 M)

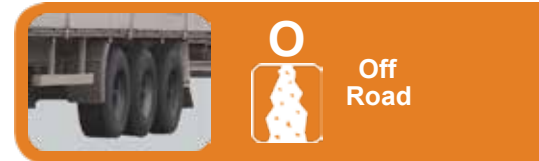

Features

- Special tread compound
- Lug and special block pattern design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance



Features

- Special tread compound
- Block pattern design
- Reinforced carcass and bead design

Benefits

- Provide outstanding resistance to puncture and tearing
- Improved traction, driving and braking performance
- Ensure excellent handling and safe performance and provide outstanding loading capacity



Operation:

- Mostly used on rugged terrain like mining or heavy construction
- Heavier loads
- High risk of damage from road conditions

Size	VI-168	VI-707
7.00R16LT	118/114 K	
7.50R16LT	122/118 K	
8.25R16LT	128/124 K	
8.25R20	139/137 C	
9.00R20	144/142 C	
10.00R20	149/146 C	149/146 K
11.00R20		152/149 K
12.00R20	154/151 C	154/151 K

Off
Road



DRIVE/TRAILER



VI-318

Features

- ▶ Lug and block pattern design
- ▶ Special tread compound
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Improved traction, driving and braking performance
- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity



VI-320

Features

- ▶ Special tread compound
- ▶ Lug and block pattern design
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Improved traction, driving and braking performance
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	VI-318	VI-320
8.25R20	139/137 C	
9.00R20	144/142 C	
10.00R20	149/146 C	
11.00R20	152/149 C	
12.00R20	154/151 C	
295/80R22.5	152/149 C	152/149 C



DRIVE/TRAILER



Off
Road



VI-321

Features


- ▶ Lug and block pattern design
- ▶ Special tread compound
- ▶ Reinforced carcass and bead design


Benefits

- ▶ Improved traction, driving and braking performance
- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	VI-321
11.00R20	152/149 C
12.00R20	154/151 C

PRODUCT RANGE

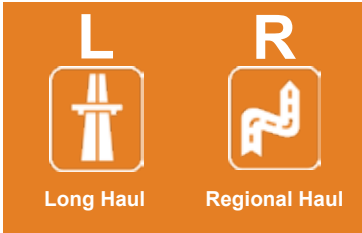

																
DIMENSION		VI-708	VI-117	VI-599+	VI-330	VI-660	VI-606	VI-606+	VI-688	VI-111	VI-121	VI-123	VI-124	VI-122	VI-668	VI-628
8.25R16LT 16PR											128/124 M					
9.00R20 16PR		144/142 K					144/142 K									
10.00R20 18PR		149/146 K					149/146 K								149/146 K	
11.00R20 18PR		152/149 K		152/149 J			152/149 K				152/149 K	152/149 K				
12.00R20 20PR		156/153 K					156/153 K									
12.00R24 20PR														160/157 K		
9.5R17.5 16PR											143/141 J					
11R22.5 16PR					148/145 M	148/145 M	148/145 M			146/143 L						148/145 M
12R22.5 18PR			152/149 L		152/149 M	152/149 M										152/149 L
13R22.5 20PR						156/152 L(154/151 M)										156/152 L(154/151 M)
11R24.5 14PR										146/143 M						
215/75R17.5 16PR						135/133 J				135/133 L						135/133 J
235/75R17.5 16PR										143/141 L						143/141 J
225/70R19.5 14PR										128/126 L						
245/70R19.5 16PR										135/133 L						
255/70R22.5 16PR						140/137 L				140/137 L						
295/75R22.5 14PR										144/141 M						
295/75R22.5 16PR										146/143 L						
295/80R22.5 18PR						152/149 M			152/149 M		152/149 M				152/149 M	152/149 M
315/70R22.5 20PR						154/150 L(152/148 M)					154/150 L(152/148 M)					154/150 L(152/148 M)
315/80R22.5 20PR						156/152 L(154/151 M)		156/152 L(154/151 M)			156/152 L(154/151 M)		156/152 L(154/151 M)	156/152 L(154/151 M)		156/152 L(154/151 M)
285/75R24.5 14PR										144/141 M						
285/75R24.5 16PR										147/144 L						

PRODUCT RANGE



															
DIMENSION	VI-607	VI-312	VI-638	VI-505	VI-323	VI-022	VI-618	VI-126	VI-127	VI-680	VI-326	VI-328	VI-331		
7.50R16 16PR									125/121 L						
10.00R20 18PR			149/146 K	149/146 K											
12.00R24 20PR	160/157 K														
11R22.5 16PR		146/143 L	148/145 M		146/143 L		148/145 M	146/143 L							
12R22.5 18PR			152/149 M				152/149 M								
11R24.5 14PR		146/143 M			146/143 M										
11R24.5 16PR		149/146 L			149/146 L			149/146 L							
235/75R17.5 16PR						143/141 J									
295/75R22.5 14PR		144/141 M			144/141 M		144/141 M								
295/75R22.5 16PR		146/143 L			146/143 L		146/143 L	146/143 L							
295/80R22.5 18PR											152/149 M				
315/70R22.5 20PR			154/150 L(152/148 M)								154/150 L				
315/80R22.5 20PR			156/152 L(154/151 M)							156/152 L(154/151 M)	156/152 L	156/152 L	156/152 L		
385/65R22.5 20PR						160 K									
285/75R24.5 14PR		144/141 M			144/141 M										
285/75R24.5 16PR		147/144 L			147/144 L			147/144 L							

PRODUCT RANGE



																			
DIMENSION	VI-702	VI-011	VI-307	VI-768	VI-706	VI-701	VI-313	VI-322	VI-729	VI-303	VI-325	VI-768W							
6.50R16LT 12PR	113/110 K																		
7.00R16LT 14PR	118/114 M				118/114 M					118/114 K									
7.50R16LT 14PR	122/118 M				122/118 M					122/118 J									
8.25R16LT 16PR	128/124 M				128/124 M		128/124 L			128/124 J									
8.25R20 16PR	139/137 L				139/137 L		139/137 K			139/137 K									
9.00R20 16PR	144/142 K				144/142 J	144/142 J	144/142 K			144/142 J									
10.00R20 18PR	149/146 K		149/146 K	149/146 K	149/146 K	149/146 K	149/146 K			149/146 K									
11.00R20 18PR	152/149 K		152/149 K	152/149 J	152/149 K	152/149 K	152/149 K			152/149 J									
12.00R20 20PR	156/153 K		156/153 K	156/153 J	156/153 K	156/153 K	156/153 K			156/153 J									
12.00R24 20PR	160/157 K							160/157 K	160/157 K		160/157 K								
11R22.5 16PR	148/145 M								148/145 L										
12R22.5 18PR	152/149 M		152/149 L	152/149 M		152/149 M													
13R22.5 20PR	156/152 L(154/151 M)			156/152 L(154/151 M)															
11R24.5 16PR	149/146 L																		
315/80R22.5 20PR		156/152 L(154/151 M)		156/152 L(154/151 M)								156/152 L(154/151 M)							

PRODUCT RANGE

[illegible]

Technical File

Size	PR	Width	A/R	Rim	LOAD INDEX	SPEED RATING	PATTERN	M+S	APPLICATION	STANDARD RIM	MAX LOAD(KG) SINGLE	MAX LOAD(KG) DUAL	MAX PRESSURE(KPA) SINGLE	MAX PRESSURE(KPA) DUAL	TREAD DEPTH (mm)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)
6.50R16LT	12	6.5		16	110/105	K	VI-702		M	5.50F	1150	1030	770	770	11.0	185	750
7.00R16LT	14	7		16	118/114	K	VI-168		O	5.50F	1320	1180	770	770	15.5	200	775
7.00R16LT	14	7		16	118/114	M	VI-702		M	5.50F	1320	1180	770	770	12.0	200	775
7.00R16LT	14	7		16	118/114	K	VI-303		M	5.50F	1320	1180	770	770	14.0	200	775
7.00R16LT	14	7		16	118/114	M	VI-706		M	5.50F	1320	1180	770	770	14.0	200	775
7.50R16LT	14	7.5		16	122/118	K	VI-168		O	6.00G	1500	1320	770	770	16.5	215	805
7.50R16LT	14	7.5		16	122/118	M	VI-011		M	6.00G	1500	1320	770	770	13	215	805
7.50R16LT	14	7.5		16	122/118	J	VI-303		M	6.00G	1500	1320	770	770	15	215	805
7.50R16LT	14	7.5		16	122/118	M	VI-706		M	6.00G	1500	1320	770	770	14	215	805
7.50R16LT	14	7.5		16	122/118	M	VI-313		M	6.00G	1500	1320	770	770	15	215	805
7.50R16LT	16	7.50		16	125/121	L	VI-127	M+S	L&R	6.00G	1650	1450	870	870	12	215	805
8.25R16LT	16	8.25		16	128/124	M	VI-121		L&R	6.50H	1800	1600	770	770	13.5	235	855
8.25R16LT	16	8.25		16	128/124	K	VI-168		O	6.50H	1800	1600	770	770	18	235	855
8.25R16LT	16	8.25		16	128/124	M	VI-702		M	6.50H	1800	1600	770	770	16	235	855
8.25R16LT	16	8.25		16	128/124	J	VI-303		M	6.50H	1800	1600	770	770	16	235	855
8.25R16LT	16	8.25		16	128/124	M	VI-706		M	6.50H	1800	1600	770	770	15	235	855
8.25R16LT	16	8.25		16	128/124	M	VI-313		M	6.50H	1800	1600	770	770	16	235	855
8.25R20	16	8.25		20	139/137	C	VI-168		O	6.5	2430	2300	930	930	21	236	974
8.25R20	16	8.25		20	139/137	L	VI-702		M	6.5	2430	2300	930	930	13.5	236	974
8.25R20	16	8.25		20	139/137	K	VI-303		M	6.5	2430	2300	930	930	16	236	974
8.25R20	16	8.25		20	139/137	L	VI-706		M	6.5	2430	2300	930	930	14.5	236	974
8.25R20	16	8.25		20	139/137	K	VI-313		M	6.5	2430	2300	930	930	16	236	974
8.25R20	16	8.25		20	139/137	C	VI-318		O	6.5	2430	2300	930	930	16	236	974
9.00R20	16	9		20	144/142	K	VI-606		L&R	7.0	2800	2650	900	900	15	259	1019
9.00R20	16	9		20	144/142	K	VI-708		L&R	7.0	2800	2650	900	900	15	259	1019
9.00R20	16	9		20	144/142	C	VI-168		O	7.0	2800	2650	900	900	21.5	259	1019
9.00R20	16	9		20	144/142	K	VI-702		M	7.0	2800	2650	900	900	15.5	259	1019
9.00R20	16	9		20	144/142	J	VI-303		M	7.0	2800	2650	900	900	17	259	1019
9.00R20	16	9		20	144/142	K	VI-706		M	7.0	2800	2650	900	900	16	259	1019
9.00R20	16	9		20	144/142	J	VI-701		M	7.0	2800	2650	900	900	16.5	259	1019
9.00R20	16	9		20	144/142	K	VI-313		M	7.0	2800	2650	900	900	17	259	1019
9.00R20	16	9		20	144/142	C	VI-318		M	7.0	2800	2650	900	900	17	258	1018
10.00R20	18	10		20	149/146	K	VI-606		L&R	7.5	3250	3000	930	930	15	278	1054
10.00R20	18	10		20	149/146	K	VI-708		L&R	7.5	3250	3000	930	930	16.5	278	1054
10.00R20	18	10		20	149/146	C	VI-168		O	7.5	3250	3000	930	930	22	278	1054
10.00R20	18	10		20	149/146	K	VI-702		M	7.5	3250	3000	930	930	16.5	278	1054
10.00R20	18	10		20	149/146	K	VI-768		M	7.5	3250	3000	930	930	18	278	1054
10.00R20	18	10		20	149/146	K	VI-303		M	7.5	3250	3000	930	930	18	278	1054
10.00R20	18	10		20	149/146	K	VI-706		M	7.5	3250	3000	930	930	17	278	1054
10.00R20	18	10		20	149/146	K	VI-307		M	7.5	3250	3000	930	930	17	278	1054
10.00R20	18	10		20	149/146	K	VI-638		L&R	7.5	3250	3000	930	930	22	278	1054
10.00R20	18	10		20	149/146	K	VI-701		M	7.5	3250	3000	930	930	17	278	1054
10.00R20	18	10		20	149/146	K	VI-313		M	7.5	3250	3000	930	930	18	278	1054
10.00R20	18	10		20	149/146	K	VI-707		O	7.5	3250	3000	930	930	20.5	278	1065
10.00R20	18	10		20	149/146	C	VI-318		O	7.5	3250	3000	930	930	18	278	1054
10.00R20	18	10		20	149/146	K	VI-668		L&R	7.5	3250	3000	930	930	21	278	1054
10.00R20	18	10		20	149/146	K	VI-505		L	7.5	3250	3000	930	930	20.5	278	1054
11.00R20	18	11		20	152/149	K	VI-606		L&R	8.0	3550	3250	930	930	17	293	1085
11.00R20	18	11		20	152/149	K	VI-708		L&R	8.0	3550	3250	930	930	17	293	1085
11.00R20	18	11		20	152/149	K	VI-121		L&R	8.0	3550	3250	930	930	15.5	293	1085
11.00R20	18	11		20	152/149	K	VI-123		L&R	8.0	3550	3250	930	930	16.5	293	1085
11.00R20	18	11		20	152/149	K	VI-702		M	8.0	3550	3250	930	930	17	293	1085
11.00R20	18	11		20	152/149	J	VI-768		M	8.0	3550	3250	930	930	18	293	1085
11.00R20	18	11		20	152/149	J	VI-303		M	8.0	3550	3250	930	930	19	293	1085
11.00R20	18	11		20	152/149	K	VI-706		M	8.0	3550	3250	930	930	17.5	293	1085
11.00R20	18	11		20	152/149	K	VI-307		M	8.0	3550	3250	930	930	17.5	293	1085
11.00R20	18	11		20	152/149	K	VI-701		M	8.0	3550	3250	930	930	18	293	1085
11.00R20	18	11		20	152/149	K	VI-313		M	8.0	3550	3250	930	930	19	293	1085
11.00R20	18	11		20	152/149	K	VI-707		O	8.0	3550	3250	930	930	21	293	1085

Technical File


Size	PR	Width	A/R	Rim	LOAD INDEX	SPEED RATING	PATTERN	M+S	APPLICATION	STANDARD RIM	MAX LOAD(KG) SINGLE	MAX LOAD(KG) DUAL	MAX PRESSURE(KPA) SINGLE	MAX PRESSURE(KPA) DUAL	TREAD DEPTH (mm)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)
11.00R20	18	11		20	152/149	C	VI-318		O	8.0	3550	3250	930	930	24	293	1085
11.00R20	18	11		20	152/149	C	VI-321		O	8.0	3550	3250	930	930	24	293	1085
11.00R20	18	11		20	152/149	J	VI-599+		L&R	8.0	3550	3250	930	930	17.5	293	1085
12.00R20	20	12		20	156/153	K	VI-606		L&R	8.5	3750	3450	830	830	17.5	315	1125
12.00R20	20	12		20	156/153	K	VI-708		L&R	8.5	3750	3450	830	830	17.5	315	1125
12.00R20	20	12		20	156/153	C	VI-168		O	8.5	3750	3450	830	830	24	315	1136
12.00R20	20	12		20	156/153	K	VI-702		M	8.5	3750	3450	830	830	17.5	315	1125
12.00R20	20	12		20	156/153	J	VI-768		M	8.5	3750	3450	830	830	20	315	1125
12.00R20	20	12		20	156/153	J	VI-303		M	8.5	3750	3450	830	830	20	315	1125
12.00R20	20	12		20	156/153	K	VI-706		M	8.5	3750	3450	830	830	18.5	315	1125
12.00R20	20	12		20	156/153	K	VI-307		M	8.5	3750	3450	830	830	18	315	1125
12.00R20	20	12		20	156/153	K	VI-701		M	8.5	3750	3450	830	830	19	315	1125
12.00R20	20	12		20	156/153	K	VI-313		M	8.5	3750	3450	830	830	20	315	1125
12.00R20	20	12		20	156/153	K	VI-707		O	8.5	3750	3450	830	830	21.5	315	1125
12.00R20	20	12		20	156/153	C	VI-318		O	8.5	3750	3450	830	830	25	315	1136
12.00R20	20	12		20	156/153	C	VI-321		O	8.5	3750	3450	830	830	25	315	1136
12.00R24	20	12		24	160/157	K	VI-122		L&R	8.5	4500	4125	900	900	15.5	315	1125
12.00R24	20	12		24	160/157	K	VI-702		M	8.5	4500	4125	900	900	16	315	1125
12.00R24	20	12		24	160/157	K	VI-607		L&R	8.5	4500	4125	900	900	20	315	1125
12.00R24	20	12		24	160/157	K	VI-322		M	8.5	4500	4125	900	900	16	315	1125
12.00R24	20	12		24	160/157	K	VI-729		M	8.5	4500	4125	900	900	19	315	1125
12.00R24	20	12		24	160/157	K	VI-325	M+S	M	8.5	4500	4125	900	900	18.5	315	1226
12.00R24	20	12		24	160/157	C	VI-707		M	8.5	4500	4125	900	900	18.5	236	1226
9.5R17.5	16	9.5		17.5	143/141	J	VI-121		L&R	6.75	2725	2575	875	875	13	240	842
11R22.5	16	11		22.5	148/145	M	VI-330	M+S	L&R	8.25	3150	2900	850	850	15	279	1054
11R22.5	16	11		22.5	148/145	M	VI-660	M+S	L&R	8.25	3150	2900	850	850	15	279	1054
11R22.5	16	11		22.5	148/145	M	VI-606	M+S	L&R	8.25	3150	2900	850	850	15	279	1054
11R22.5	16	11		22.5	146/143	L	VI-111	M+S	L&R	8.25	3000	2725	830	830	15	279	1054
11R22.5	16	11		22.5	148/145	M	VI-618	M+S	L&R	8.25	3150	2900	850	850	11.5	279	1054
11R22.5	16	11		22.5	148/145	M	VI-702	M+S	M	8.25	3150	2900	850	850	15.5	279	1054
11R22.5	16	11		22.5	148/145	M	VI-638	M+S	L&R	8.25	3150	2900	850	850	20	279	1054
11R22.5	16	11		22.5	148/145	M	VI-628	M+S	L&R	8.25	3150	2900	850	850	16.5	279	1054
11R22.5	16	11		22.5	146/143	L	VI-312	M+S	L&R	8.25	3000	2725	830	830	21.5	279	1065
11R22.5	16	11		22.5	148/145	L	VI-729	M+S	M	8.25	3000	2725	830	830	21.5	279	1065
11R22.5	16	11		22.5	146/143	L	VI-323	M+S	L&R	8.25	3000	2725	830	830	21.5	279	1065
11R22.5	16	11		22.5	146/143	L	VI-126	M+S	L&R	8.25	3000	2725	830	830	10	279	1054
12R22.5	18	12		22.5	152/149	M	VI-330		L&R	9.00	3550	3250	930	930	16.5	300	1085
12R22.5	18	12		22.5	152/149	M	VI-660		L&R	9.00	3550	3250	930	930	16.5	300	1085
12R22.5	18	12		22.5	152/149	L	VI-117		L&R	9.00	3550	3250	930	930	16	300	1085
12R22.5	18	12		22.5	152/149	M	VI-618		L&R	9.00	3550	3250	930	930	12.5	300	1085
12R22.5	18	12		22.5	152/149	M	VI-702	M+S	M	9.00	3550	3250	930	930	16	300	1085
12R22.5	18	12		22.5	152/149	M	VI-768		M	9.00	3550	3250	930	930	20	300	1085
12R22.5	18	12		22.5	152/149	L	VI-307		M	9.00	3550	3250	930	930	16	300	1085
12R22.5	18	12		22.5	152/149	M	VI-638	M+S	L&R	9.00	3550	3250	930	930	16	300	1085
12R22.5	18	12		22.5	152/149	L	VI-628		L&R	9.00	3550	3250	930	930	17.5	300	1085
12R22.5	18	12		22.5	152/149	M	VI-701	M+S	M	9.00	3550	3250	930	930	18.5	300	1085
13R22.5	20	13		22.5	156/152(154/151)	L(M)	VI-660	M+S	L&R	9.75	4000	3550	860	860	17	320	1124
13R22.5	20	13		22.5	156/152(154/151)	L(M)	VI-702	M+S	M	9.75	4000	3550	860	860	16.5	320	1124
13R22.5	20	13		22.5	156/152(154/151)	L(M)	VI-768	M+S	M	9.75	4000	3550	860	860	20	320	1124
13R22.5	20	13		22.5	156/152(154/151)	L(M)	VI-628	M+S	L&R	9.75	4000	3550	860	860	18	320	1124
11R24.5	14	11		24.5	146/143	M	VI-111		L&R	8.25	3000	2725	720	720	15	279	1104
11R24.5	14	11		24.5	146/143	M	VI-312		L&R	8.25	3000	2725	720	720	21.5	279	1104
11R24.5	14	11		24.5	146/143	M	VI-323	M+S	L&R	8.25	2800	2575	760	760	22	283	1062
11R24.5	16	11		24.5	149/146	L	VI-111		L&R	8.25	3250	3000	830	830	15	279	1104
11R24.5	16	11		24.5	149/146	L	VI-702	M+S	M	8.25	3250	3000	830	830	15.5	279	1104
11R24.5	16	11		24.5	149/146	L	VI-312		L&R	8.25	3250	3000	830	830	21.5	279	1104
11R24.5	16	11		24.5	149/146	L	VI-323	M+S	M	8.25	3250	3000	830	830	21.5	279	1116
11R24.5	16	11		24.5	149/146	L	VI-126	M+S	M	8.25	3250	3000	830	830	10	302	1104

Technical File

Size	PR	Width	A/R	Rim	LOAD INDEX	SPEED RATING	PATTERN	M+S	APPLICATION	STANDARD RIM	MAX LOAD(KG) SINGLE	DUAL	MAX PRESSURE(KPA) SINGLE	DUAL	TREAD DEPTH (mm)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)
215/75R17.5	16	215	75	17.5	135/133	J	VI-660	M+S	L&R	6.00	2180	2060	850	850	12	212	767
215/75R17.5	16	215	75	17.5	135/133	L	VI-111	M+S	L&R	6.00	2180	2060	850	850	13	212	767
215/75R17.5	16	215	75	17.5	135/133	J	VI-628	M+S	L&R	6.00	2180	2060	850	850	14	212	767
235/75R17.5	16	235	75	17.5	143/141	J	VI-022	M+S	L&R	6.75	2725	2575	875	875	13	233	797
235/75R17.5	16	235	75	17.5	143/141	L	VI-111	M+S	L&R	6.75	2725	2575	875	875	13	233	797
235/75R17.5	16	235	75	17.5	143/141	J	VI-628	M+S	L&R	6.75	2725	2575	875	875	15	233	797
225/70R19.5	14	225	70	19.5	128/126	L	VI-111		L&R	6.75	1800	1700	760	760	13	226	811
245/70R19.5	16	245	70	19.5	135/133	L	VI-111		L&R	7.50	2180	2060	830	830	13	248	839
255/70R22.5	16	255	70	22.5	140/137	L	VI-660		L&R	7.50	2500	2300	830	830	14	255	930
255/70R22.5	16	255	70	22.5	140/137	L	VI-111		L&R	7.50	2500	2300	830	830	13	255	930
295/75R22.5	14	295	75	22.5	144/141	M	VI-111		L&R	9.00	2800	2575	760	760	15.5	298	1014
295/75R22.5	14	295	75	22.5	144/141	M	VI-312		L&R	9.00	2800	2575	760	760	22	298	1026
295/75R22.5	14	295	75	22.5	144/141	M	VI-618	M+S	L&R	9.00	2800	2575	760	760	11	298	1014
295/75R22.5	14	295	75	22.5	144/141	M	VI-323	M+S	L&R	9.00	2800	2575	760	760	22	298	1026
295/75R22.5	16	295	75	22.5	146/143	L	VI-111		L&R	9.00	3000	2725	830	830	15.5	298	1014
295/75R22.5	16	295	75	22.5	146/143	L	VI-312		L&R	9.00	3000	2725	830	830	22	298	1026
295/75R22.5	16	295	75	22.5	146/143	L	VI-618	M+S	L&R	9.00	3000	2725	830	830	11	298	1014
295/75R22.5	16	295	75	22.5	146/143	L	VI-323	M+S	L&R	9.00	3000	2725	830	830	22	298	1026
295/75R22.5	16	295	75	22.5	146/143	L	VI-126	M+S	L&R	9.00	3000	2725	830	830	10	298	1014
295/80R22.5	18	295	80	22.5	152/149	C	VI-320	M+S	O	9.00	3550	3250	900	900	21.5	298	1044
295/80R22.5	18	295	80	22.5	152/149	M	VI-121	M+S	L&R	9.00	3550	3250	900	900	16.5	298	1044
295/80R22.5	18	295	80	22.5	152/149	M	VI-660	M+S	L&R	9.00	3550	3250	900	900	15	298	1044
295/80R22.5	18	295	80	22.5	152/149	M	VI-688	M+S	L&R	9.00	3550	3250	900	900	15	298	1044
295/80R22.5	18	295	80	22.5	152/149	M	VI-628	M+S	L&R	9.00	3550	3250	900	900	20.5	298	1044
295/80R22.5	18	295	80	22.5	152/149	C	VI-318	M+S	O	9.00	3550	3250	900	900	21.5	298	1044
295/80R22.5	18	295	80	22.5	152/149	M	VI-668	M+S	L&R	9.00	3550	3250	900	900	18	298	1044
295/80R22.5	18	295	80	22.5	152/149	M	VI-326	M+S	L&R	9.00	3550	3250	900	900	17.5	298	1044
315/70R22.5	20	315	70	22.5	154/150(152/148)	L(M)	VI-660	M+S	L&R	9.00	3750	3350	900	900	15	312	1014
315/70R22.5	20	315	70	22.5	154/150(152/148)	L(M)	VI-121	M+S	L&R	9.00	3750	3350	900	900	15.5	312	1014
315/70R22.5	20	315	70	22.5	154/150(152/148)	L(M)	VI-638	M+S	L&R	9.00	3750	3350	900	900	20	312	1014
315/70R22.5	20	315	70	22.5	154/150(152/148)	L(M)	VI-628	M+S	L&R	9.00	3750	3350	900	900	21	312	1014
315/70R22.5	20	315	70	22.5	154/150	L	VI-326	M+S	L&R	9.00	3750	3350	900	900	19.5	312	1014
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	VI-660	M+S	L&R	9.00	4000	3550	860	860	14.5	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	VI-606	M+S	L&R	9.00	4000	3550	860	860	14.5	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	VI-121	M+S	L&R	9.00	4000	3550	860	860	15.5	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	VI-122	M+S	L&R	9.00	4000	3550	860	860	16.5	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	VI-124	M+S	L&R	9.00	4000	3550	860	860	15.5	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	VI-011	M+S	M	9.00	4000	3550	860	860	17.5	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	VI-768	M+S	M	9.00	4000	3550	860	860	23	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	VI-638	M+S	L&R	9.00	4000	3550	860	860	23	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	VI-628	M+S	L&R	9.00	4000	3550	860	860	20	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	VI-322	M+S	M	9.00	4000	3550	860	860	20.5	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	VI-680	M+S	L&R	9.00	4000/3550	8820/7830	860/860	125/125	14.5	312	1076
315/80R22.5	20	315	80	22.5	156/152	L	VI-326	M+S	L&R	9.00	4000	3550	860	860	20	312	1076
315/80R22.5	20	315	80	22.5	156/152	L	VI-328	M+S	L&R	9.00	4000	3550	860	860	20	312	1076
315/80R22.5	20	315	80	22.5	156/152	L	VI-331	M+S	L&R	9.00	4000	3550	860	860	20	312	1076
315/80R22.5	20	315	80	22.5	156/152(154/151)	L(M)	VI-768W	M+S	M	9.00	4000	3550	860	860	23	312	1082
385/65R22.5	20	385	65	22.5	160	K	VI-022	M+S	L&R	11.75	4500	-	900	-	17	389	1072
285/75R24.5	14	285	75	24.5	144/141	M	VI-111		L&R	8.25	2800	2575	760	760	15.5	283	1050
285/75R24.5	14	285	75	24.5	144/141	M	VI-312		L&R	8.25	2800	2575	760	760	22	283	1056
285/75R24.5	14	285	75	24.5	144/141	M	VI-323	M+S	L&R	8.25	2800	2575	760	760	22	283	1062
285/75R24.5	16	285	75	24.5	147/144	L	VI-111		L&R	8.25	3075	2800	830	830	15.5	283	1050
285/75R24.5	16	285	75	24.5	147/144	L	VI-312		L&R	8.25	3075	2800	830	830	22	283	1056
285/75R24.5	16	285	75	24.5	147/144	L	VI-323	M+S	L&R	8.25	3075	2800	830	830	22	283	1062

Technical File

[illegible]

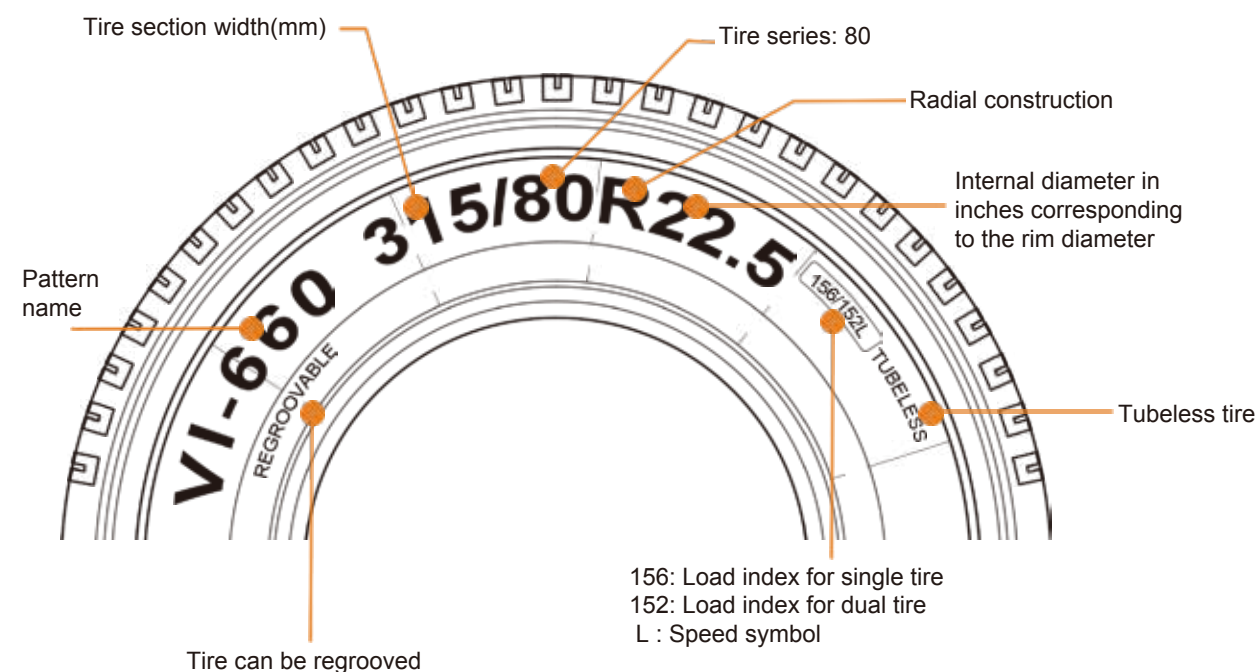

Refer to the Speed Symbols and Load Capacity Index tables below



Before fitting, it is essential to check the different markings to ensure that the tires meet the maximum load and speed possibilities and/or the regulations in force


Speed Symbols

SI	km/h
B	50
C	60
D	65
E	70
F	80
G	90
J	100
K	110
L	120
M	130
N	140
P	150
Q	160
R	170


Load Capacity Index

LI	KG	LI	KG	LI	KG
115	1215	136	2240	157	4125
116	1250	137	2300	158	4250
117	1285	138	2360	159	4375
118	1320	139	2430	160	4500
119	1360	140	2500	161	4625
120	1400	141	2575	162	4750
121	1450	142	2650	163	4875
122	1500	143	2725	164	5000
123	1550	144	2800	165	5150
124	1600	145	2900	166	5300
125	1650	146	3000	167	5450
126	1700	147	3075	168	5600
127	1750	148	3150	169	5800
128	1800	149	3250	170	6000
129	1850	150	3350	171	6150
130	1900	151	3450	172	6300
131	1950	152	3550	173	6500
132	2000	153	3650	174	6700
133	2060	154	3750	175	6900
134	2120	155	3875	176	7100
135	2180	156	4000	177	7300

Important instructions for safe inflation

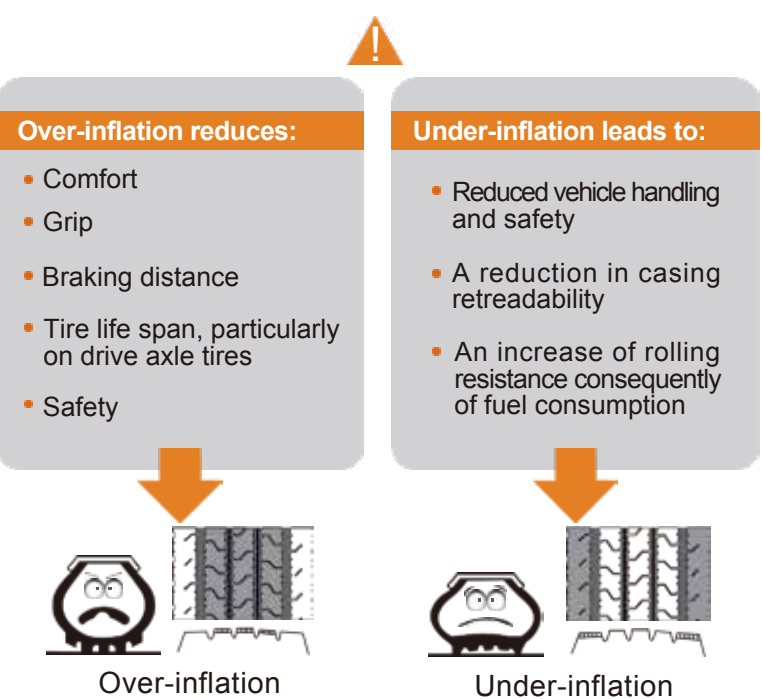

Effect of inflation pressure on tire life

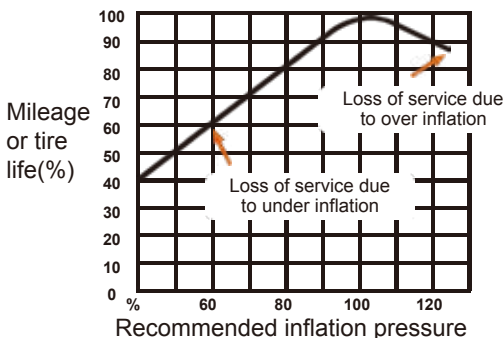

ADVICE BEFORE INFLATION

- 1 Weigh your vehicle and its load, axle by axle, to determine tire pressure
- 2 Measure the pressure when cold (when the vehicle has been stationary for several hours): pressures must be checked at regular intervals and during each service
- 3 Important safety instruction: pressure increases when the vehicle is in motion, never reduce the pressure of a hot tire
- 4 Pressure gauges: must be accurate, handled with care and calibrated regularly



Caution: Driving with insufficient pressure can damage your tires. Have your tires fully checked over by an expert



