

PRINX

PRINX

PRODUCTS BROCHURE

CAR / SUV / VAN



wonders ahead

www.prinxtire.com

 | VEHICLE

HiRACE HZ1



PRECISE
HANDLING



ANTI
-HYDROPLANING



QUIET



SPORT UHP, HIGH & MEDIUMCAR,
SPORT CAR



- Asymmetry tread pattern: The central widened rib provides you with excellent handling. The outer straight grooves effectively improve cornering performance.
- Optimal anti-hydroplaning & Safety.
- Four wider grooves with optimized sipes for better water evacuation and offer you a safer ride in wet conditions.
- The design of multi-pitch with narrowed gap contributes to reduced noise.

Rim Diameter	Size	Load Type	LI	SS
16	225/55R16	XL	99	W
	205/55R17	XL	95	W
	225/45R17	XL	94	W
17	225/50R17	-	94	W
	225/55R17	XL	101	W
	235/50R17	XL	100	W
	245/40R17	XL	95	W
	225/40R18	XL	92	W
18	225/45R18	XL	95	W
	225/55R18	-	98	W
	245/40R18	XL	97	W
	255/40R18	XL	99	W
	225/45R19	XL	96	W
	235/45R19	XL	99	W
19	235/50R19	XL	103	W
	255/45R19	XL	104	Y
20	265/40R20	XL	104	W



HZ2



Excellent Handling



Safety



Comfort

Asymmetric pattern design and large outside shoulder pattern block provide Excellent handling experience.

Safe driving experience thanks to four wide main grooves and dense sipes.

Application of PNS (Pattern Noise Simulation) technology for reducing road noise and quieter ride.



HZ2

Rim Diameter	Size	LI	SS	Load Type	UTQG
16	205/45ZR16	87	W	XL	500AA
	205/55ZR16	94	W	XL	500AA
	215/55ZR16	97	W	XL	500AA
17	205/45ZR17	88	W	XL	500AA
	205/50ZR17	93	W	XL	500AA
	215/45ZR17	91	W	XL	500AA
	215/50ZR17	95	W	XL	500AA
	215/55ZR17	94	W		500AA
	225/45ZR17	94	W	XL	500AA
	225/50ZR17	98	W	XL	500AA
	225/55ZR17	97	W		500AA
	235/45ZR17	97	W	XL	500AA
	235/55ZR17	99	W		500AA
	245/40ZR17	95	W	XL	500AA
	245/45ZR17	99	Y	XL	500AA
18	255/40ZR17	98	W	XL	500AA
	275/40ZR17	102	W	XL	500AA
	215/45ZR18	93	Y	XL	500AA
	225/40ZR18	92	Y	XL	500AA
	225/45ZR18	95	Y	XL	500AA
	225/50ZR18	95	Y		500AA
	235/40ZR18	95	Y	XL	500AA
	235/45ZR18	98	Y	XL	500AA
	235/50ZR18	101	Y	XL	500AA
	245/35ZR18	92	Y	XL	500AA
	245/40ZR18	97	Y	XL	500AA
	245/45ZR18	100	Y	XL	500AA
18	255/35ZR18	94	Y	XL	500AA

*UNDER DEVELOPMENT

HZ2

Rim Diameter	Size	LI	SS	Load Type	UTQG
18	255/40ZR18	99	Y	XL	500AA
	255/45ZR18	103	Y	XL	500AA
	265/35ZR18	97	Y	XL	500AA
	275/35ZR18	99	W	XL	500AA
	275/40ZR18	103	Y	XL	500AA
19	265/30ZR19	93	Y	XL	500AA
	225/40ZR19	93	Y	XL	500AA
	235/35ZR19	91	Y	XL	500AA
	245/35ZR19	93	Y	XL	500AA
	245/40ZR19	98	Y	XL	500AA
	245/45ZR19	102	Y	XL	500AA
	255/35ZR19	96	Y	XL	500AA
	255/40ZR19	100	Y	XL	500AA
	275/35ZR19	100	Y	XL	500AA
	275/40ZR19	105	Y	XL	500AA
20	285/35ZR19	103	Y	XL	500AA
	305/30ZR19	102	Y	XL	500AA
	245/35ZR20	95	Y	XL	500AA
	245/40ZR20	99	Y	XL	500AA
	245/45ZR20	103	Y	XL	500AA
	255/35ZR20	97	Y	XL	500AA
	255/45ZR20	105	Y	XL	500AA
22	285/30ZR20	99	Y	XL	500AA
	*235/30ZR22	90	W	XL	500AA
	*245/30ZR22	92	W	XL	500AA
	*255/30ZR22	95	W	XL	500AA
24	275/30ZR24	101	Y	XL	500AA

*UNDER DEVELOPMENT

HiCITY HH1



ECONOMY

STABLE
HANDLING

WET GRIP



ORDINARY FAMILY CAR TIRES



Stable handling

- The central ribs ensure stable handling, the blade shaped sipes on both sides disperse water effectively. The grooves become closed at later phase of usage to minimize rolling noise.

Fuel economy & longevity

- High-tech tread compound with special sipes design optimizes rolling resistance to reduce fuel consumption, and enhance tire longevity and durability.

Exceptional wet braking

- Tiny transverse grooves and sipes on shoulder guarantee exceptional braking safety and handling stability in wet conditions.

Rim Diameter	Size	Load Type	LI	SS
12	145/70R12	-	69	T
13	175/70R13	-	82	T
14	175/65R14	-	82	H
	175/70R14	-	84	H
	185/60R14	XL	86	H
	185/65R14	-	86	H
	185/70R14	-	88	H
15	175/65R15	-	84	H
	185/55R15	-	82	V
	185/60R15	-	84	H
	185/65R15	-	88	H
	195/50R15	-	82	V
	195/55R15	-	85	H
	195/60R15	-	88	H
	195/65R15	-	91	H
	205/65R15	-	94	H
16	195/60R16	-	89	H
	205/55R16	-	91	V
	205/60R16	-	92	H
	215/60R16	-	95	H



HH2



Comfort



Safety



Long Mileage

HH2

Rim Diameter	Size	LI	SS	Load Type	UTQG
14	175/65R14	82	T		540AA
	175/70R14	84	T		540AA
	185/65R14	86	H		540AA
	195/70R14	91	T		600AA
15	165/50R15	72	V		540AA
	175/55R15	77	H		540AA
	175/65R15	84	H		540AA
	185/55R15	82	V		540AA
	185/60R15	84	H		540AA
	185/65R15	88	H		540AA
	195/50R15	86	V	XL	600AA
	195/55R15	85	V		600AA
	195/60R15	88	H		600AA
	195/65R15	91	H		600AA
	205/65R15	99	H	XL	600AA
	205/70R15	96	H		600AA
16	215/70R15	98	T		600AA
	185/55R16	83	H		540AA
	195/50R16	84	V		600AA
	195/55R16	87	V		600AA
	205/55R16	94	V	XL	600AA
	205/60R16	92	V		600AA
	205/65R16	95	H		600AA
	205/70R16	97	H		600AA
	215/55R16	97	V	XL	600AA
	215/60R16	95	V		600AA
	215/65R16	98	H		600AA
	215/70R16	100	H		600AA
	225/60R16	98	V		600AA
	225/65R16	100	H		600AA

HH2

Rim Diameter	Size	LI	SS	Load Type	UTQG
16	225/70R16	103	H		600AA
	235/60R16	100	H		600AA
	235/65R16	103	H		600AA
	235/70R16	106	H		600AA
17	205/50R17	93	V	XL	600AA
	215/50R17	95	V	XL	600AA
	215/55R17	94	V		600AA
	215/60R17	100	H	XL	600AA
	215/65R17	99	H		600AA
	225/50R17	98	V	XL	600AA
	225/55R17	97	V		600AA
	225/60R17	99	V		600AA
	225/65R17	102	H		600AA
	235/50R17	96	V		600AA
	235/55R17	99	V		600AA
	235/60R17	102	V		600AA
18	235/65R17	108	V	XL	600AA
	245/50R17	99	V		600AA
	215/55R18	95	V		600AA
	225/55R18	98	V		600AA
	225/60R18	100	V		600AA
	235/50R18	97	V		600AA
	235/55R18	100	V		600AA
	235/60R18	103	V		600AA
	235/65R18	106	H		600AA
	245/55R18	103	V		600AA
19	245/60R18	105	V		600AA
	255/65R18	111	H		600AA
	235/40R19	96	V		600AA

Continuous ribs in the middle to ensure straight stability.

Multi-pitch pattern design with dense sipes effectively adjust the tread stiffness and reduce noise, bring a good driving experience.

Four wide main grooves improve traction and handling in wet conditions.

Closed and Rigid shoulder design to help eliminate abnormal wear and greatly prolong the life of the tire.



HiRACE HP1



PUTS 4X4
PERFORMANCE SAFELY



COMFORTABLY
ON THE ROAD



SUV



- Responsive handling guaranteed by computer-optimized asymmetric pattern design.
- Outstanding cornering stability derived from the rigid outer shoulder blocks.
- Reliable anti-hydroplaning brought by unique sipe sculpture on the inner shoulder.
- Powerful grip and cornering stability even on wet surface
- Pleasant ride comfort from reduced noise level by optimized multi-pitch tread design.

Rim Diameter	Size	Load Type	LI	SS
17	215/65R17	-	99	V
	225/65R17	-	102	H
	235/45R17	XL	97	W
	225/50R18	XL	99	W
18	235/45R18	XL	98	W
	235/60R18	XL	107	V
	235/65R18	XL	110	H
	245/45R18	XL	100	W
	255/45R18	XL	103	W
	255/55R18	XL	109	V
	275/40R18	XL	103	W
	225/55R19	-	99	W
19	235/55R19	-	101	H
	235/55R19	XL	105	W
	245/45R19	XL	102	W
	245/55R19	-	103	W
	255/50R19	XL	107	V
	255/55R19	XL	111	W
	275/40R19	XL	105	W
	285/45R19	XL	111	V
	235/55R20	-	102	V
20	245/35R20	XL	95	W
	245/45R20	XL	103	W
	255/45R20	XL	105	W
	255/50R20	XL	109	Y
	265/50R20	XL	111	V
	275/40R20	XL	106	V
	275/45R20	XL	110	V
	275/55R20	XL	117	V
	295/30R20	XL	101	W
	305/30R20	XL	103	W
21	315/35R20	XL	110	V
	275/45R21	XL	110	W
	295/40R21	XL	111	W
22	265/35R22	XL	102	W



HT2



Good Handling



Long Mileage



Good Comfort

Four wide grooves improve traction and handling in wet conditions.

Continuous rigid shoulder design provides stability while reducing irregular wear and make the life of tire longer.

The dual pitch design in the middle effectively reduces the noise, provide a comfort driving experience.



HT2

Rim Diameter	Size	LI	SS	Load Type	UTQG
15	215/75R15	100	T		600AB
	225/70R15	100	T		600AB
	225/75R15	102	T		600AB
	235/75R15	109	T	XL	600AB
	LT235/75R15	104/101	S	6PR	
16	215/70R16	100	H		600AB
	225/75R16	104	T		600AB
	235/70R16	106	T		600AB
	235/75R16	112	T	XL	600AB
	245/70R16	107	T		600AB
	245/75R16	111	T		600AB
	255/70R16	111	T		600AB
	265/70R16	112	T		600AB
	265/75R16	116	T		600AB
	LT215/85R16	115/112	R	10PR	
17	LT225/75R16	115/112	S	10PR	
	LT235/85R16	120/116	S	10PR	
	LT245/75R16	120/116	S	10PR	
	LT265/75R16	123/120	S	10PR	
	225/65R17	102	H		600AB
	235/65R17	108	H	XL	600AB
	245/65R17	107	T		600AB
	245/70R17	110	T		600AB
	255/70R17	112	T		600AB
	265/65R17	112	T		600AB
17	265/70R17	115	T		600AB
	LT235/80R17	120/117	R	10PR	
	LT245/75R17	121/118	S	10PR	

*UNDER DEVELOPMENT

HT2

Rim Diameter	Size	LI	SS	Load Type	UTQG
17	LT265/70R17	121/118	S	10PR	
18	235/60R18	107	V	XL	600AB
	235/65R18	106	H		600AB
	245/60R18	105	H		600AB
	255/55R18	109	V	XL	600AB
	255/65R18	111	H		600AB
	255/70R18	113	T		600AB
	265/60R18	110	H		600AB
	265/65R18	114	H		600AB
	265/70R18	116	T		600AB
	275/65R18	116	T		600AB
19	LT265/70R18	124/121	S	10PR	
	LT275/65R18	123/120	S	10PR	
	LT275/70R18	125/122	S	10PR	
	225/55R19	99	V		600AB
	235/55R19	101	V		600AB
20	245/55R19	103	V		600AB
	255/60R19	109	H		600AB
	245/50R20	102	V		600AB
	255/55R20	110	H	XL	600AB
	265/50R20	111	T	XL	600AB
22	275/55R20	113	H		600AB
	275/60R20	115	H		600AB
	LT275/65R20	126/123	S	10PR	
	LT285/50R20	119/116	S	10PR	
22	285/45R22	114	H	XL	600AB

*UNDER DEVELOPMENT

HiFREE HA1




SUPER GRIP



DURABILITY



SUV

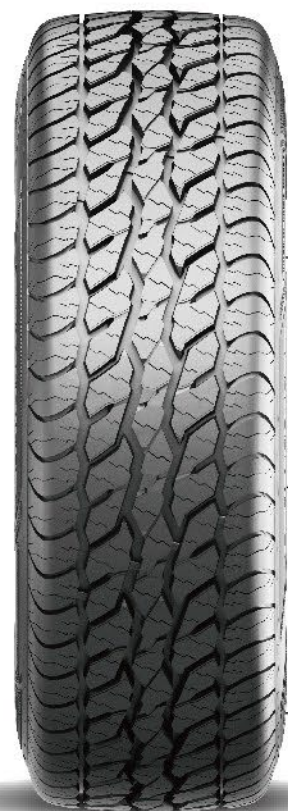

- Super grip
- Eagle beak shaped block provides outstanding off road traction.
- Specially designed tie-bar in the central rib reduces uneven wear, and enhances grip.

- Excellent durability
- Reinforced polyester cord ensures tire strength and comfort, reduces sidewall deformation and increases tire rigidity.

- Lower noise
- Optimized void ratio coupled with wavy sipes ensure excellent grip and wet performance while effectively reducing noise.

Rim Diameter	Size	Load Type	LI	SS	Remark
15	205/60R15	-	91	H	-
	205/70R15	-	96	T	-
	215/75R15	-	100	T	-
	235/75R15	XL	109	T	-
16	205/60R16	-	92	H	-
	215/65R16	-	98	H	-
	225/75R16	XL	108	T	-
	235/70R16	-	106	T	-
	245/70R16	-	107	T	-
	245/75R16	-	111	T	-
	265/70R16	-	112	T	-
	265/70R16LT	10PR	121/118	Q	OE
	265/75R16	-	116	T	OE
17	265/75R16LT	10PR	123/120	Q	OE
	245/65R17	-	107	T	-
	265/65R17	-	112	T	-
	265/70R17	-	115	T	-
	265/70R17LT	10PR	121/118	Q	OE
	275/65R17	-	115	T	-
	285/65R17	-	116	T	-
18	245/60R18	-	105	T	-
	265/60R18	-	110	H	-



HA2



Good Traction



Reliable Safety



Durability

Unique tread pattern and wide tread cap design provide excellent traction and stability in on and off road conditions.

Large block pattern makes the off-road driving safe.

Strong shoulder and sidewall design significantly improve the durability of tire.



HA2

Rim Diameter	Size	LI	SS	Load Type	UTQG
15	31X10.50R15LT	109	S	6PR	
16	245/75R16	111	T		560AB
	265/70R16	112	T		560AB
	265/75R16	116	T		560AB
	LT225/75R16	115/112	S	10PR	
	LT235/85R16	120/116	R	10PR	
	LT245/75R16	120/116	S	10PR	
	LT265/75R16	123/120	S	10PR	
17	LT285/75R16	126/123	R	10PR	
	245/65R17	111	T	XL	560AB
	245/70R17	110	T		560AB
	265/65R17	112	T		560AB
	265/70R17	115	T		560AB
	LT235/80R17	120/117	R	10PR	
	LT245/70R17	119/116	S	10PR	
	LT245/75R17	121/118	S	10PR	
	LT265/70R17	121/118	S	10PR	
18	LT285/70R17	121/118	S	10PR	
	265/65R18	114	T		560AB
	275/65R18	116	T		560AB
	LT265/70R18	124/121	S	10PR	
	LT275/65R18	123/120	S	10PR	
20	LT275/70R18	125/122	S	10PR	
	275/55R20	117	T	XL	560AB
	275/60R20	115	T		560AB
	LT265/60R20	121/118	S	10PR	
	LT275/65R20	126/123	S	10PR	
	LT285/55R20	122/119	S	10PR	
	LT325/60R20	126/123	S	10PR	



HM1



Excellent Traction



Superb Endurance

Simulation of sharp tooth pattern block, even though contact with bad road, it also provides excellent grip and traction ability.

Wide pattern block design effectively prevent bad road cutting, bring excellent durability.

The reinforced shoulder pattern block and 3D sidewall design can pass freely under various road conditions.



HM1

Rim Diameter	Size	LI	SS	Load Type
15	31X10.50R15LT	109	Q	6PR
	33X12.50R15LT	108	Q	6PR
	LT235/75R15	110/107	Q	8PR
16	LT235/85R16	120/116	Q	10PR
	LT245/75R16	120/116	Q	10PR
	LT265/75R16	123/120	Q	10PR
	LT285/75R16	126/123	Q	10PR
	LT305/70R16	124/121	Q	10PR
17	35X12.50R17LT	121	Q	10PR
	LT265/70R17	121/118	Q	10PR
	LT285/70R17	121/118	Q	10PR
18	33X12.50R18LT	118	Q	10PR
	35X12.50R18LT	123	Q	10PR
	LT275/65R18	123/120	Q	10PR
20	33X12.50R20LT	114	Q	10PR
	35X12.50R20LT	121	Q	10PR
	37X13.50R20LT	127	Q	10PR
	LT305/55R20	121/118	Q	10PR
22	33X12.50R22LT	109	Q	10PR
	35X12.50R22LT	121	Q	12PR
	37X12.50R22LT	127	Q	12PR
	37X13.50R22LT	128	Q	12PR
	LT325/50R22	122	Q	10PR



HV1



Longevity



Economy




Durability

Massive central ribs ensure tread rigidity and optimize tire longevity.

Tire shoulder with straight tie-bar and special groove design avoid irregular wear ,improve cornering stability.

Innovative tread compound with silica provides better grip on wet roads, lower rolling resistance and reduced fuel consumption.



HV1

Rim Diameter	Size	LI	SS	Load Type
14	185R14C	102/100	R	8PR
	195R14C	106/104	R	8PR
15	195R15C	106/104	R	8PR





HL1 NEW PRODUCT



Long Mileage



High Load

The tread is designed with 3D technology, effectively improve the driving safety both in dry and wet road condition.

The central and lateral grooves balance the tread rigidity reasonably, adapt to various road conditions better.

Sidewall strengthening design, higher load and effectively reduce the risk of bulge, better durability.

Closed shoulder design is beneficial to improve tire rigidity, wear resistance and avoid abnormal wear.

Strengthen the skeleton material and groove bottom, make the tire more stronger, ensure driving safety also in bad road condition.



HL1

Rim Diameter	Size	LI	SS	Load Type
15	185/60R15C	94/92	T	6PR
	195/75R16C	107/105	R	8PR
16	205/75R16C	113/111	R	10PR
	*LT215/85R16	115/112	R	10PR
	LT225/75R16	115/112	R	10PR
	*LT235/85R16	120/116	R	10PR
	LT245/75R16	120/116	S	10PR
	LT265/75R16	123/120	R	10PR
	225/75R16C	121/120	R	10PR
	235/65R16C	121/119	R	10PR
17	*LT235/80R17	120/117	R	10PR
	LT245/70R17	119/116	S	10PR
	LT265/70R17	121/118	R	10PR
	LT245/75R17	121/118	S	10PR
18	LT275/65R18	123/120	R	10PR
	LT275/70R18	125/122	S	10PR

*UNDER DEVELOPMENT



